
all dimensions in mm



## Part Number: BN02-0178-C06WP

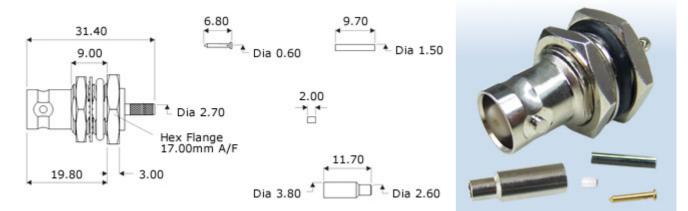

BNC Waterproof Crimp Bulkhead Jack, IP68

Phosphor Bronze, Nickel plated - 15.9mm dia.

## Details and Specifications

Description
To Fit Cable Types
Body
Contact
Dielectric
Ferrule
Locknut
O Ring
Pin
Washer
Cable Retention
Dielectric Withstanding
Durability
Impedance
Max. Frequency
Temperature Range
Working Voltage
Maximum Panel Thickness

## Assembly Information

Panel Cut-out

 Strip Dimensions
 A=11mm, B=1mm, C=3mm

 Cable Preparation
 A C

 Crimp Tooling
 PCC0308 GCT-D316

 Crimp Hex. Sizes
 3.25mm Hex., Solder centre core

 Panel Fixing Information
 A=12.00mm, B=12.90mm

 Cut-out Dimensions
 A=12.00mm, B=12.90mm

RG178

PTFE

Brass, Nickel plated Brass, Gold plated

Brass, Nickel plated

500 mating cycles

-65 to +165 degrees C 500 Volts RMS Maximum

50 ohms 4 GHz

6mm

Silicon Rubber Brass, Gold plated

Brass, Nickel plated - 16mm A/F

Equal to breaking strain of cable 1500 Volts RMS Maximum

This document is the property of Gigatronix Limited and may not be copied or reproduced without written authorisation from Gigatronix limited. Revision Control No. 111003.2. website: www.gigatronix.co.uk email: sales@gigatronix.co.uk

в