
all dimensions in mm



Part Number: TN02-0178-C06WP



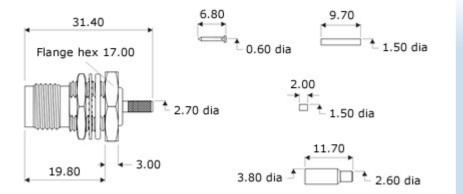

Details and Specifications

Description To Fit Cable Types Body Contact Dielectric Ferrule Locknut O Ring Pin Washer Cable Retention Dielectric Withstanding Durability Impedance Max. Frequency Temperature Range Working Voltage Maximum Panel Thickness

RG178 Brass, Nickel plated Brass, Gold plated PTFE Brass, Nickel plated Brass, Nickel plated - 16mm A/F Silicon Rubber Brass, Gold plated Phosphor Bronze, Nickel plated - 15.9mm dia. Equal to breaking strain of cable 1500 Volts RMS Maximum 500 mating cycles 50 ohms 3 GHz -65 to +165 degrees C 500 Volts RMS Maximum 6mm

TNC Waterproof Crimp Bulkhead Jack, IP68

Assembly Information

Strip Dimensions
A=11mm, B=1mm, C=3mm

Cable Preparation
Image: A image: Composition of the composition of th

This document is the property of Gigatronix Limited and may not be copied or reproduced without written authorisation from Gigatronix limited. Revision Control No. 110923.3. website: www.gigatronix.co.uk email: sales@gigatronix.co.uk