



**PB-22E08 (SELF-LOCK)**

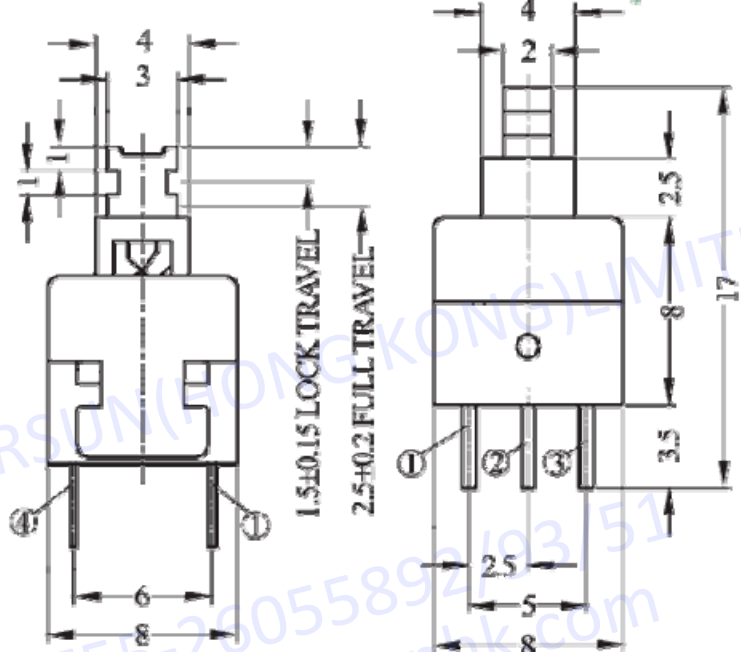

**PB-22E18 (NON-LOCK)**

**CIRCUIT DIAGRAM**



**RATING: DC 30V 0.1A**

**垂直推动开关主要技术特性**

**The Main Technical Characteristics of Vertical Push Switch**

额定负荷	DC 30V 0.1A	操作温度	-16℃ to 60℃
Rated Load		Operating Temperature	
接触电阻	< 50 mΩ	寿命	10,000 次
contact Resistance		Life Test	
绝缘电阻	> 100 MΩ	作用力	80gf ± 30gf 120gf ± 30gf
Insulation Resistance		Operating Force	200gf ± 100gf 300gf ± 100gf 400gf ± 150gf 550gf ± 150gf
耐电压	500V 0.5mA/min		
Dielectric Strength			