


SPECIFICATIONS

Switch Function	SPST, SPDT
Electrical Ratings	15A @ 125VAC 8A @ 250VAC
Electrical Life	10,000 cycles typical
Contact Resistance	< 50 mΩ initial
Dielectric Strength	1500Vrms min
Insulation Resistance	> 100MΩ min
Operating Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C



RA US - 222871

MATERIALS





Actuator	6/6 Nylon
Housing	6/6 Nylon
Contacts	Silver Alloy
Terminals	Brass, Sn Plated

ORDERING INFORMATION


1. Series:	RA	1	1	2	2	C	W	C
2. Number of Poles:								
1 = Single Pole								
3. Switch Function:								
1 = OFF-ON **LED only available with this function								
2 = OFF-(ON)								
3 = (OFF)-ON								
4 = ON-ON								
5 = ON-(ON)								
6 = ON-OFF-ON								
7 = (ON)-OFF-(ON)								
8 = ON-OFF-(ON)								
4. Housing Color:								
1 = White								
2 = Black								
9 = Gray								
5. Actuator Color:								
1 = White	6 = Orange							
2 = Black	7 = Blue							
3 = Red	9 = Gray							
6. Actuator Marking:								
A D G J M								
B E H K X **X marking used with LED only								
C F I L								
7. Actuator Marking Color:								
Blank = No Marking **Use this option for X actuator marking (LED)								
B = Black								
W = White								
R = Red								
8. Terminal Options:								
C = .187" Quick Connects / Solder Lug								
P = PC Pins								
R = Right Angle PC Pins ** Not available with LED option								
L = Left Angle PC Pins ** Not available with LED option								
9. LED Options: (For use with ON-OFF function & "X" actuator marking only)								
Blank = No LED								
R = Red B = Blue								
Y = Yellow								
G = Green								

DIMENSIONS

SCHEMATICS & PC LAYOUTS

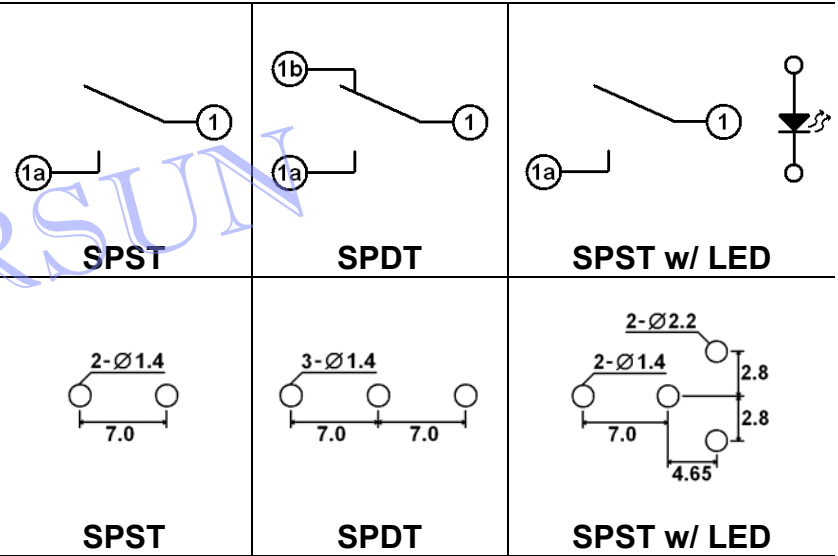

ACTUATOR MARKING OPTIONS

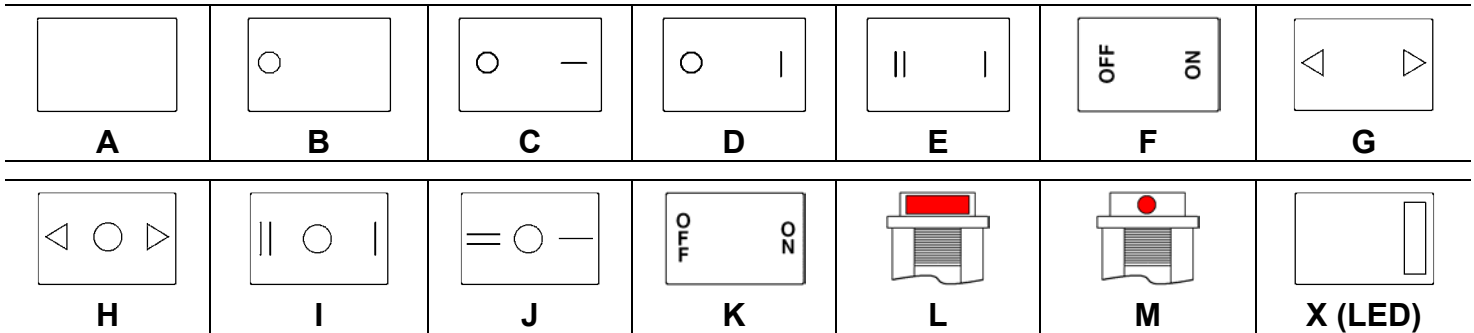

TERMINAL OPTIONS

