SPECIFICATIONS

RATING:5VDC. 1mA.
INSULATION RESISTANCE:50VDC-10M MIN.
WITHSTAND VOLTAGE:50VAC-1 MINUTE
ROTARY TORQUE:3~60 gf.cm.
TOTAL ROTARY ANGLE:360°(12 PULSE)
LIFE CYCLE:20,000 CYCLES

REA-100

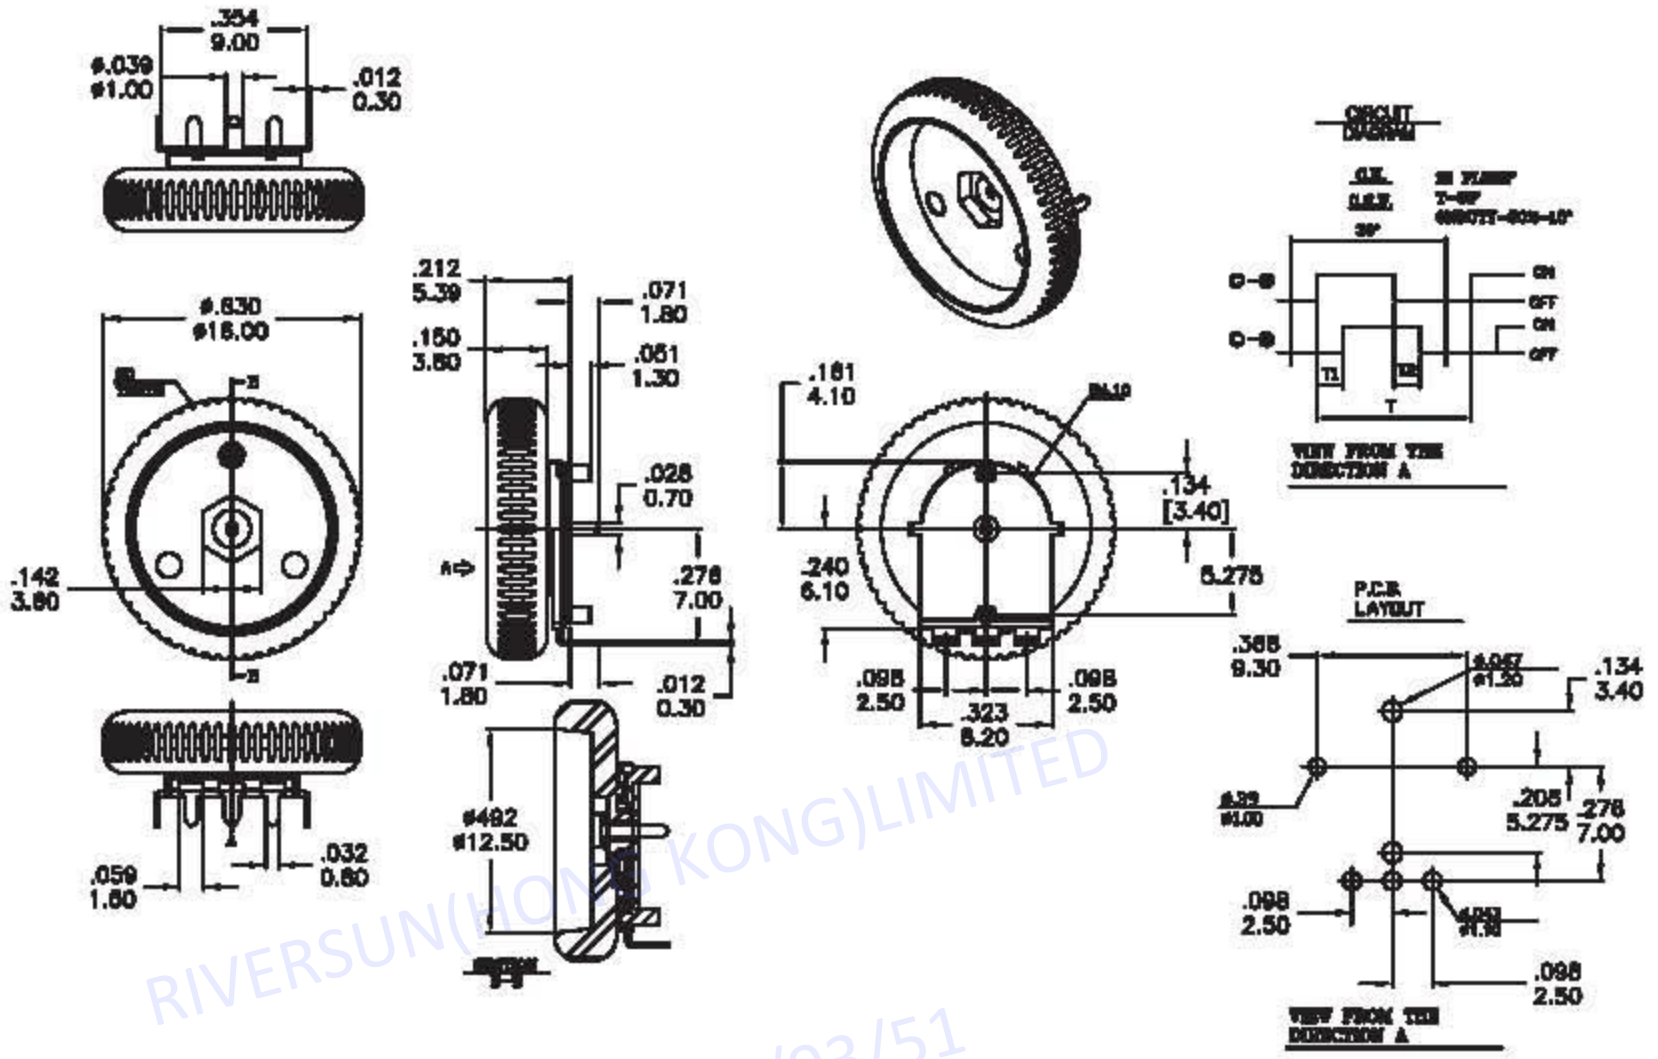

REB-100

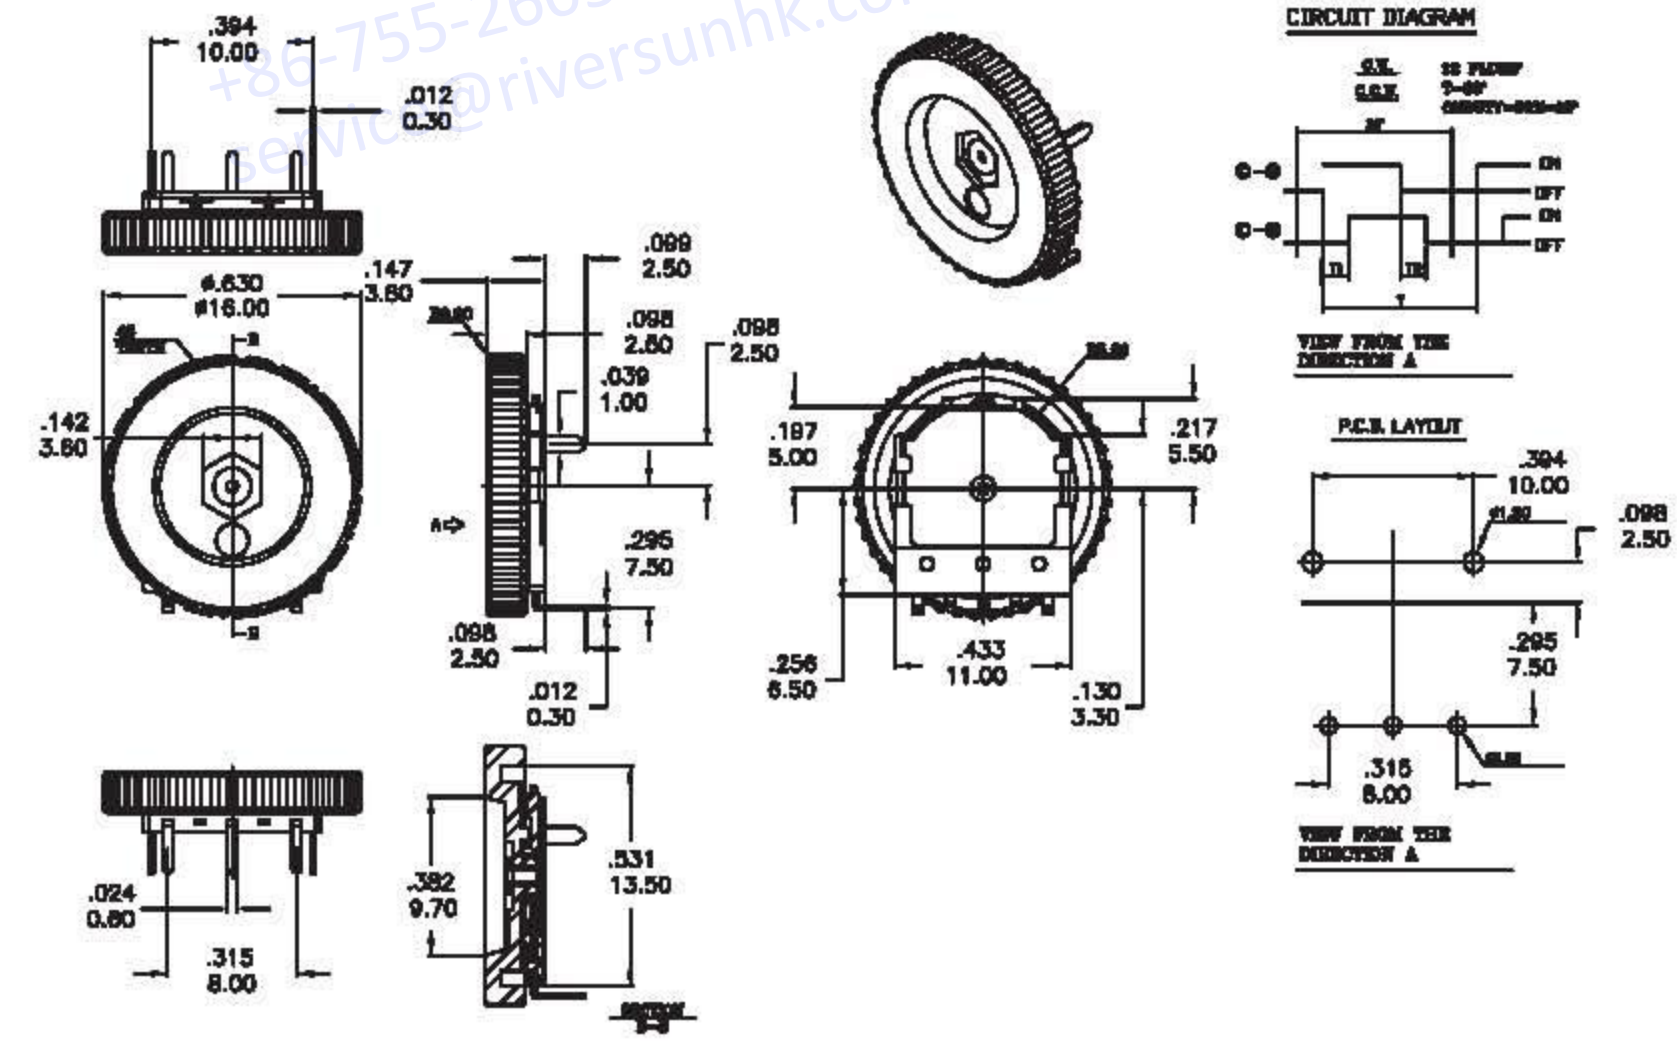

The recommandations are for these series as below

DHN , DHNF , EPI , EPM , DS , DA , DP , MSS, SS , DTS , TA3 , TA4 , TML , MTA ,TE , TL , RH , RV , RM , PT , TMG

RIVERSUN(HONG KONG)LIMITED
+86-755-26055892/93/51
service@riversunhk.com