



Part Number: MB15-D316-C01

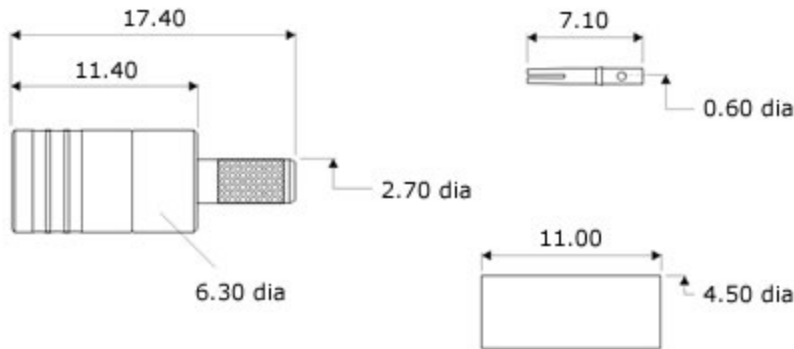

Details and Specifications

Description	SMB Crimp Plug, Gold Plated
To Fit Cable Types	RD316
Body	Brass, Gold Plated
Contact	Beryllium Copper, Gold Plated
Dielectric	PTFE
Ferrule	Brass, Gold Plated
Cable Retention	Equal to breaking strain of cable
Dielectric Withstanding	750 Volts RMS Maximum
Durability	500 mating cycles
Impedance	50 ohms
Max. Frequency	4 GHz
Temperature Range	-65 to +165 degrees C
Working Voltage	335 Volts RMS Maximum

Assembly Information

Strip Dimensions	A=5mm, B=3.5mm, C=2.5mm
Cable Preparation	
Crimp Tooling	GCT-D316
Crimp Hex. Sizes	3.83mm Hex., 0.72mm Square