



**Part Number: TN02-3162-C06WP**

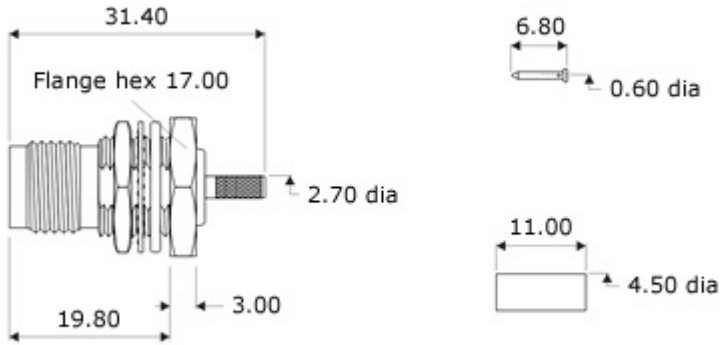

**Details and Specifications**

Description	TNC Waterproof Crimp Bulkhead Jack, IP68
To Fit Cable Types	RD316
Body	Brass, Nickel plated
Contact	Brass, Gold plated
Dielectric	PTFE
Ferrule	Brass, Nickel plated
Locknut	Brass, Nickel plated - 16mm A/F
O Ring	Silicon Rubber
Pin	Brass, Gold plated
Washer	Phosphor Bronze, Nickel plated - 15.9mm dia.
Cable Retention	Equal to breaking strain of cable
Dielectric Withstanding	1500 Volts RMS Maximum
Durability	500 mating cycles
Impedance	50 ohms
Max. Frequency	6 GHz
Temperature Range	-65 to +165 degrees C
Working Voltage	500 Volts RMS Maximum
Maximum Panel Thickness	6mm

**Assembly Information**

Strip Dimensions	A=7.5mm, B=5.0mm, C=2.5mm
Cable Preparation	
Crimp Tooling	GCT-D316
Crimp Hex. Sizes	3.83mm Hex., 0.72mm Square

**Panel Fixing Information**

Cut-out Dimensions	A=12.00mm, B=12.90mm
--------------------	----------------------

Panel Cut-out

